



Surge Protective Device

Paperless Datasheet

Going green and protecting environment is manufacturers' responsibility. Each WatchfulEyE product has a link of downloading data sheet on its enclosure:
<http://datasheet.watchfuleyesolutions.com/US120253.html>

Model & Ordering Code

| Model | Ordering Code | Remote Contacts | UPC/EAN Code | |
|---------------------|---------------------|-----------------|------------------|------------|
| WTH-80/B+C/R/1P-150 | US120253 | YES | (0) 811914030652 | |
| WTH-80/B+C/1P-150 | US120243 | NO | (0) 811914030713 | |
| Model with suffix | WTH-80/B+C/R/1P-150 | x2pcs | x3pcs | x4pcs |
| Ordering Code | US120253 | US120253x2 | US120253x3 | US120253x4 |
| Model with suffix | WTH-80/B+C/1P-150 | x2pcs | x3pcs | x4pcs |
| Ordering Code | US120243 | US120243x2 | US120243x3 | US120243x4 |



Certificates of Products



LISTED
E345944



RoHS

IEC61643-11



Surge Protective Device

Description


In accordance with: IEC 61643-11 - Class I+II and UL1449 Type 4 Location
Location of use: main sub-distribution boards, branch sub-distribution boards
Plug-in module and separate base design enables convenient maintenance.
Internal thermal disconnect devices help ensure safe or at end-of-life

WTH-80/B+C/R/1P-150 Series Technical Data

| | |
|--|--|
| Requirement Class to IEC61643-11 | Class I+II |
| IEEE Category Rating | C, B & A |
| Maximum Continuous Operating Voltage (Uc/MCOV) | 150VAC 50/60Hz |
| Nominal Discharge Current (In) | 40kA |
| Max. Discharge Current (Imax) | 80kA |
| Pulsed Current (Iimp) | 10kA |
| Voltage Protection Level (Up) | 1.6kV |
| Residual Voltage (Ures) | 0.8kV |
| Protection Modes | L-PE, N-PE |
| Protective Element | MOV |
| Follow Current (If) | NO |
| Response Time (tA) | <5ns |
| Leakage Current (at 75%U1mA) | <20μA |
| Thermal Protection | YES |
| Protection Rating (IP Code) | IP 20 |
| Short Circuit Current Ratings (SCCR) | 25kA rms |
| Max. Back-up Fuse (if mains >125A) | 125A gL (circuit-breaker: <63A) |
| Surge Life at 3kA (8/20μs) | >5000 events |
| Temperature Range | - 40°F to 176°F (-40°C to 80°C) |
| Relative Humidity | 0% to 95% noncondensing |
| Maximum Operating Altitude | 10,000 feet (3000m) |
| Terminal Cross Section | 35mm ² (solid) / 25mm ² (stranded) |
| Stripping Length Contacts | 0.6inches (15mm) |
| Terminal Screw Torque | Max. 3.5Nm |
| DIN Rail EN60715 | 35mm top-hat rail |
| Dimensions DIN 43880 | 36mm (2TE) |
| Housing Material | Thermoplastic (UL94 V-0) |
| Housing Design | Modular design |
| Net Weight Per Unit | 0.5Lb (227g) |

Surge Protective Device


Surge Protection Connection Diagram

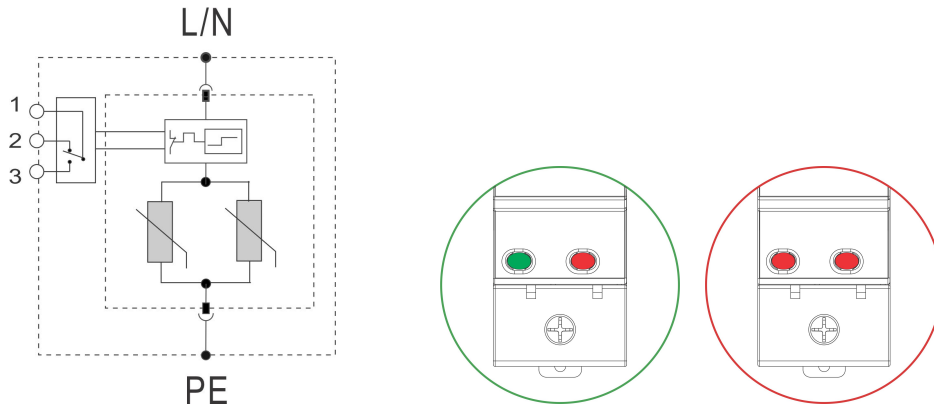

Indication of two levels of surge protection

The capability of displaying 50 percent of surge protection capacity: under normal circumstances, with two MOVs' protection at the same time, the module can realize Class I surge protection; in case that one of the indicator windows indicates red, there's still 50% of surge protection capacity to meet Class II surge protection requirements, and the module shall be replaced timely at this point.

Dimensions

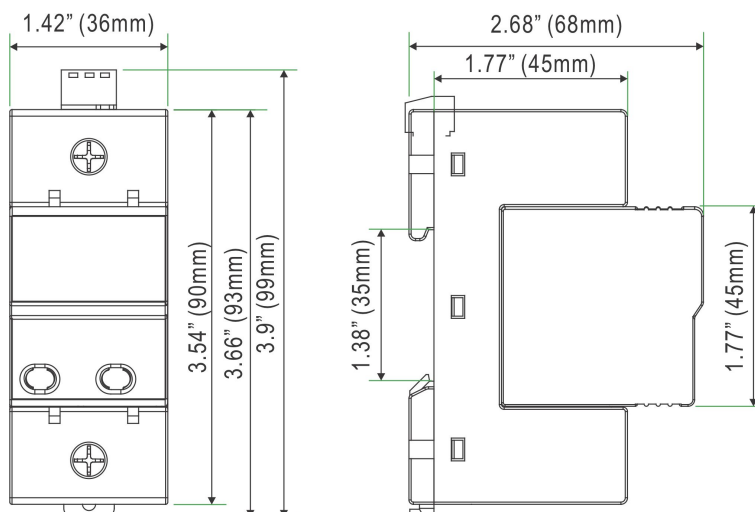

Surge Protective Device


Remote Contacts

- 1: COM (Common)
- 2: NC (Normally Close)
- 3: NO (Normally Open)



| | |
|---------------------------|-------------------------|
| Contact Ratings | 125VAC/3A, 250VAC/1.5A |
| Terminal Cross Section | Max. 1.5mm ² |
| Stripping Length Contacts | 0.25 inches (6-7mm) |
| Remote Terminal Torque | 0.25Nm |

Fault Indication

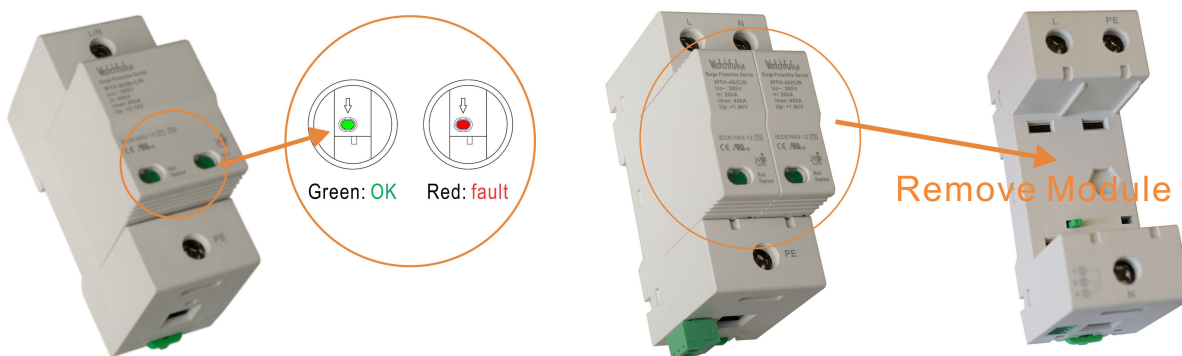



Surge Protective Device

Common Terms and Definitions

1. Normal operating voltage rating (U_n)

2. Maximum Continuous Operating Voltage (U_c /MCOV):

Maximum r.m.s. voltage, which may be continuously applied to the surge protective device's mode of protection.

3. Nominal Discharge Current for Class II Test (I_n):

crest value of the current through the surge protective device having a current waveshape of 8/20 μ s.

4. Maximum Discharge Current (I_{max}):

Crest value of a current through the surge protective device having an 8/20 μ s waveshape and magnitude according to the manufacturers specification. I_{max} is equal to or greater than I_n .

5. Voltage Protection Level (U_p):

Maximum voltage to be expected at the surge protective device terminals due to an impulse stress with defined voltage steepness and an impulse stress with a discharge current with given amplitude and waveshape.

6. Residual Voltage (U_{res}):

Crest value of voltage that appears between the terminals of an surge protective device due to the passage of discharge current.

7. IEEE 62.41

CATEGORY C: outdoor overhead lines, service entrance (most severe)

CATEGORY B: major feeder, short branch circuits, service panel (indoor)

CATEGORY A: long branch circuits, receptacles (indoor) (least severe)

How to choose a suitable U_c (MCOV) value

Note: $U_c > 1.15U_n$

The relationship between two parameters U_c and U_p of a surge protective device is proportional.

If U_c is small, the value of U_p is also small; surge protective devices with smaller U_p can provide better surge protection. Whether to choose smaller U_c depends on the voltage stability of the grid.

If you choose surge protective devices with smaller U_c for the grid with instable voltage, the surge protective devices will frequently work while the grid voltage fluctuates, resulting in shortening surge protective device's product life.


If you choose larger U_c , and the value of U_p is accordingly large, the surge protective efficiency will not be so fine.

If you are unsure of the voltage stability of the grid,

it is suggested to calculate MCOV(U_c) using the following formula: $\sqrt{2} U_n < U_c < \sqrt{3} U_n$

| AC Network (U_n) | MCOV(U_c), L/N-PE Protection Mode |
|----------------------|---------------------------------------|
| 110V | 150V |
| 120/208V | 150V |
| 127/220V | 150V |
| 220/380V | 275V, 320V, 385V |
| 230/400V | 275V, 320V, 385V, 420V |
| 240/415V | 320V, 385V, 420V |
| 277/480V | 320V, 385V, 420V |
| 347/600V | 550V, 690V |


AC Network Connection Diagram

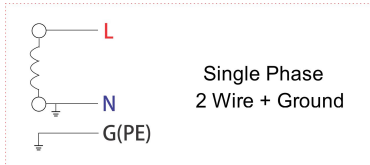


Single Phase
2 Wire + Ground

AC System Voltage


L-N:
110V, 120V, 127V



2P Combination




1P+NPE Combination

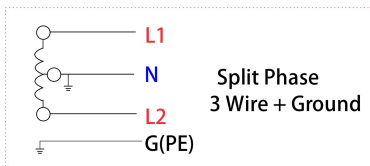


Split Phase
3 Wire + Ground

AC System Voltage


L-N/L-L:
120/240V
127/254V



3P Combination




2P Combination

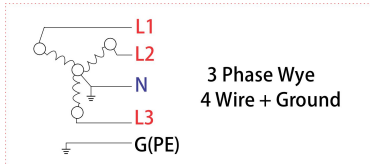


3 Phase Wye
4 Wire + Ground

AC System Voltage


L-N/L-L:
120V/208Y
127V/220Y



4P Combination




3P+NPE Combination

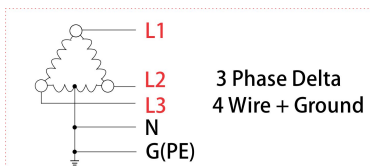


3 Phase Delta
4 Wire + Ground

AC System Voltage

L-N/L-L:
120/240V




4P Combination



3P+NPE Combination

Difference mode & Common mode Connection Diagram

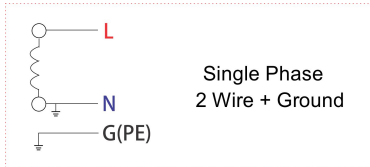


AC System Voltage


L-N:

110V, 120V, 127V
220V, 230V, 240V
277V, 480V

3P Full Protection




2P, L-N, N-PE Mode




Common mode: L-PE, N-PE surge protection

Difference mode: L-N surge protection

Selection of back-up fuse

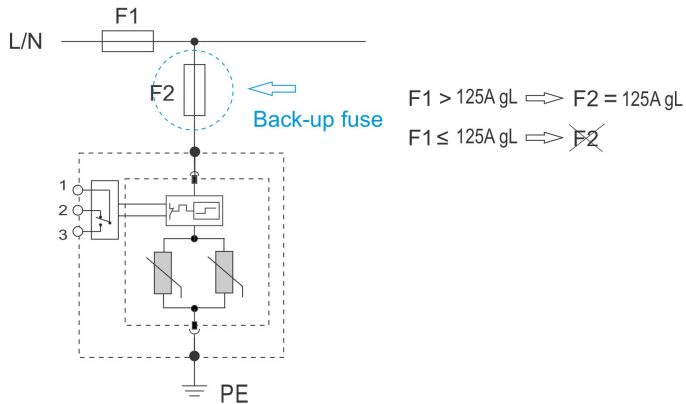


Selection of back-up circuit-breaker

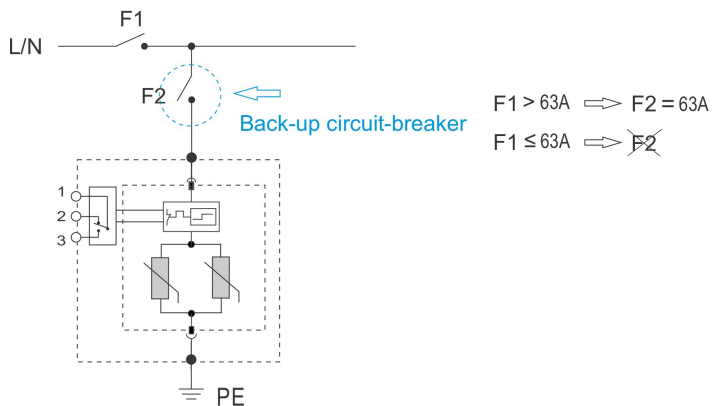

Surge Protective Device

Application

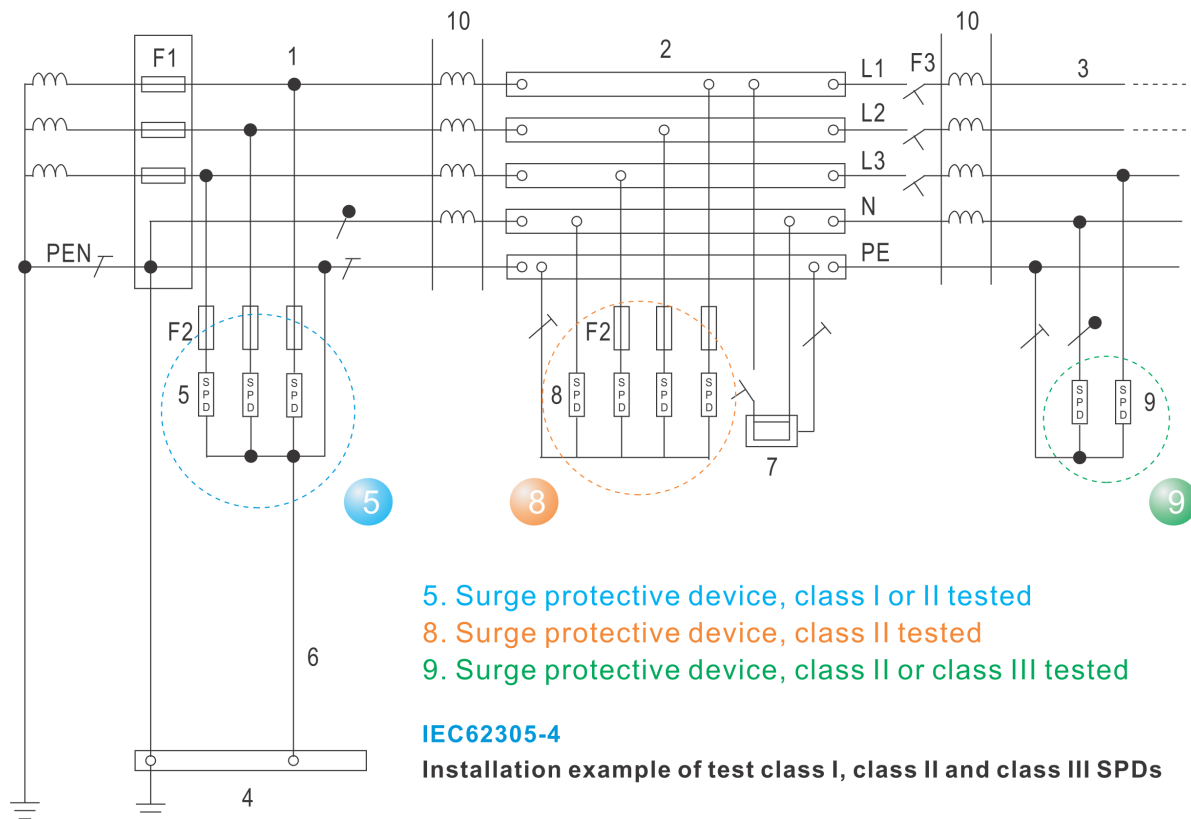

Key

1. Origin of the installation
 2. Distribution board
 3. Distribution outlet
 4. Main earthing terminal or bar
 5. Surge protective device, class I or II tested
 6. Earthing connection (earthing conductor) of the surge protective device
 7. Fixed equipment to be protected
 8. Surge protective device, class II tested
 9. Surge protective device, class II or class III tested
 10. Decoupling element or line length
- F1, F2, F3 overcurrent protective disconnectors
- NOTE Refer to IEC 61643-12 for further information.



Surge Protective Device

FAQ & Help

1. What should I do if I can't find the paper manual in the product packaging?

Watchful Eye products is committed to going green with paperless data sheets. On the side of each product enclosure is an engraved link with URL for downloading paperless data sheet and QR code of the website. If you need the paper data sheet, you can open the link and print the data sheet by yourself.

2. The advantages of fault indication windows?

If surge protection fails, the fault indication windows will turn red, thus it can be seen intuitively, and the surge protective device can be replaced in time to avoid damage to the equipment caused by a second surge.

3. What instruments can be used to test whether its surge protection function is normal or not?

Test with a Watchful Eye surge protector tester

4. Can you list more applications?

Power supply panel, whole house

5. What is the feature of Class I+II?

It provides high capability of Class I surge protection, and capability of Class II (equivalent to the parameters of WTH-40) fine protection with low residual voltage as well, applying to Class I and Class II surge protection in multiple areas. If you are not sure which module to choose for protecting your area, Class I + II is the best solution.



Surge Protective Device

Download WatchfulEye Official App

To learn about more products and updates from company, please scan QR code to download the official App:



After-sale Services

Watchful Eye provides a 5-year quality warranty globally.

[I have a question](#)