



## Surge Protective Device

---

WTH-65/B+C/R Series	
Paperless Datasheet	01
Model & Ordering Code	01
Certificates of Products	01
More Package	02
Technical Data	03
Surge Protection Connection Diagram	04
Dimensions	04
Remote Contacts (Dry Contacts)	05
Fault Indication	05
Common Terms and Definitions	06
How to choose a suitable $U_c$ (MCOV) value	06
AC Network Connection Diagram	07
Difference mode & Common mode Connection Diagram	08
Selection of back-up fuse	09
Selection of back-up circuit-breaker	09
Application	10
N-PE Module	11
3P + NPE Combintion Package	11
1P + NPE Combintion Package	11
FAQ & Help	12
Download WatchfulEyE Official App	13
After-sale Services	13
I have a question	13



## Surge Protective Device

### Paperless Datasheet

Going green and protecting environment is manufacturers' responsibility. Each WatchfulEyE product has a link of downloading data sheet on its enclosure:

<http://datasheet.watchfuleyesolutions.com/US120214.html>

### Model & Ordering Code

Model	Ordering Code	MCOV/Uc	Remote Contacts	UPC/EAN Code
WTH-65/B+C/R/1P-275	US120214	275VAC	YES	(0) 811914030546
WTH-65/B+C/R/1P-275	US120204		NO	(0) 811914030607
WTH-65/B+C/R/1P-320	US120215	320VAC	YES	(0) 811914030553
WTH-65/B+C/R/1P-320	US120205		NO	(0) 811914030614
WTH-65/B+C/R/1P-385	US120216	385VAC	YES	(0) 811914030560
WTH-65/B+C/R/1P-385	US120206		NO	(0) 811914030621
WTH-65/B+C/R/1P-420	US120217	420VAC	YES	(0) 811914030577
WTH-65/B+C/R/1P-420	US120207		NO	(0) 811914030638



### Certificates of Products



LISTED  
E345944



RoHS

IEC61643-11



## Surge Protective Device

### More Package

Model with suffix	WTH-65/B+C/R/1P-275	x2pcs	x3pcs	x4pcs
Ordering Code	US120214	US120214x2	US120214x3	US120214x4

Model with suffix	WTH-65/B+C/R/1P-275	x2pcs	x3pcs	x4pcs
Ordering Code	US120204	US120204x2	US120204x3	US120204x4

Model with suffix	WTH-65/B+C/R/1P-320	x2pcs	x3pcs	x4pcs
Ordering Code	US120215	US120215x2	US120215x3	US120215x4

Model with suffix	WTH-65/B+C/R/1P-320	x2pcs	x3pcs	x4pcs
Ordering Code	US120205	US120205x2	US120205x3	US120205x4

Model with suffix	WTH-65/B+C/R/1P-385	x2pcs	x3pcs	x4pcs
Ordering Code	US120216	US120216x2	US120216x3	US120216x4

Model with suffix	WTH-65/B+C/R/1P-385	x2pcs	x3pcs	x4pcs
Ordering Code	US120206	US120206x2	US120206x3	US120206x4

Model with suffix	WTH-65/B+C/R/1P-420	x2pcs	x3pcs	x4pcs
Ordering Code	US120217	US120217x2	US120217x3	US120217x4

Model with suffix	WTH-65/B+C/R/1P-420	x2pcs	x3pcs	x4pcs
Ordering Code	US120207	US120207x2	US120207x3	US120207x4



## Surge Protective Device


### Description

In accordance with: IEC 61643-11 - Class I+II and UL1449 Type 4 Location  
Location of use: main sub-distribution boards, branch sub-distribution boards  
One-piece compact design with minimized volume but maximized capability of Class I+II surge protection.  
Internal thermal disconnect devices help ensure safe or at end-of-life

### WTH-65/B+C/R/1P Series Technical Data


Requirement Class to IEC61643-11	Class I+II
IEEE Category Rating	C, B & A
Nominal Discharge Current (In)	30kA
Max. Discharge Current (Imax)	65kA
Pulsed Current (Iimp)	7.5kA
Protection Modes	L-PE, N-PE
Protective Element	High Energy MOV
Follow Current (If)	NO
Response Time (tA)	<5ns
Leakage Current (at 75%U1mA)	<20μA
Thermal Protection	YES
Protection Rating (IP Code)	IP 20
Short Circuit Current Ratings (SCCR)	25kA rms
Max. Back-up Fuse (if mains >100A)	100A gL (circuit-breaker: <50A)
Surge Life at 3kA (8/20μs)	>5000 events
Temperature Range	- 40°F to 176°F (-40°C to 80°C)
Relative Humidity	0% to 95% noncondensing
Maximum Operating Altitude	10,000 feet (3000m)
Terminal Cross Section	35mm <sup>2</sup> (solid) / 25mm <sup>2</sup> (stranded)
Stripping Length Contacts	0.6inches (15mm)
Terminal Screw Torque	Max. 3.5Nm
DIN Rail EN60715	35mm top-hat rail
Dimensions DIN 43880	20mm
Housing Material	Thermoplastic (UL94 V-0)
Housing Design	Compact design
Net Weight Per Unit	0.3Lb (136g)

### Surge Protection Connection Diagram

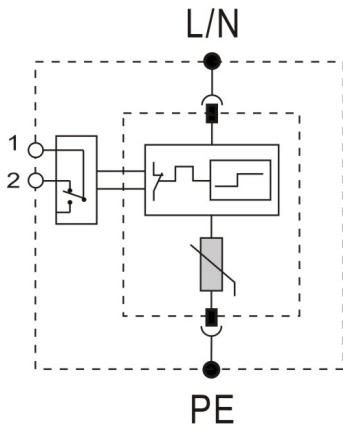



Maximum Continuous Operating Voltage (MCOV/Uc)	275VAC	320VAC	385VAC	420VAC
Voltage Protection Level (Up)	1.6kV	1.8kV	1.9kV	2.0kV
Residual Voltage (Ures)	1.0kV	1.1kV	1.2kV	1.4kV

### Dimensions

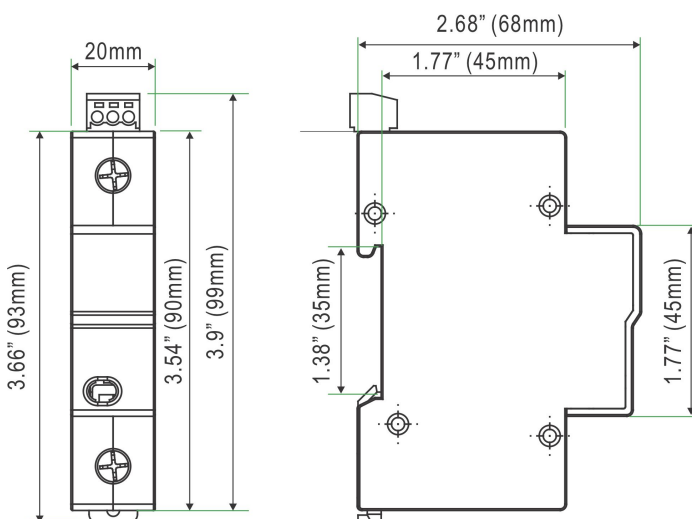


### Remote Contacts (Dry Contacts)

- 1: COM (Common)
- 2: NC (Normally Close)

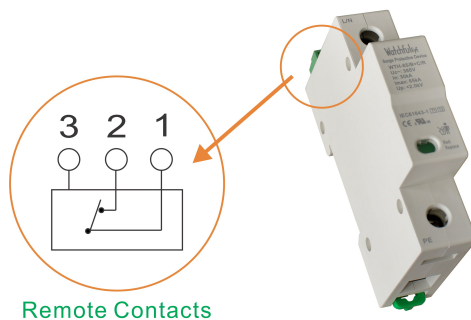

Contact Ratings	125VAC/3A, 250VAC/1.5A
Terminal Cross Section	Max. 1.5mm <sup>2</sup>
Stripping Length Contacts	0.25 inches (6-7mm)
Remote Terminal Torque	0.25Nm

### Fault Indication

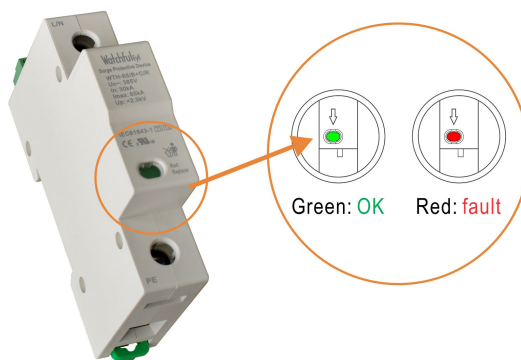



## Surge Protective Device

### Common Terms and Definitions

1. Normal operating voltage rating ( $U_n$ )

2. Maximum Continuous Operating Voltage ( $U_c$ /MCOV):

Maximum r.m.s. voltage, which may be continuously applied to the surge protective device's mode of protection.

3. Nominal Discharge Current for Class II Test ( $I_n$ ):

crest value of the current through the surge protective device having a current waveshape of 8/20 $\mu$ s.

4. Maximum Discharge Current ( $I_{max}$ ):

Crest value of a current through the surge protective device having an 8/20 $\mu$ s waveshape and magnitude according to the manufacturers specification.  $I_{max}$  is equal to or greater than  $I_n$ .

5. Voltage Protection Level ( $U_p$ ):

Maximum voltage to be expected at the surge protective device terminals due to an impulse stress with defined voltage steepness and an impulse stress with a discharge current with given amplitude and waveshape.

6. Residual Voltage ( $U_{res}$ ):

Crest value of voltage that appears between the terminals of an surge protective device due to the passage of discharge current.

7. IEEE 62.41

CATEGORY C: outdoor overhead lines, service entrance (most severe)

CATEGORY B: major feeder, short branch circuits, service panel (indoor)

CATEGORY A: long branch circuits, receptacles (indoor) (least severe)

### How to choose a suitable $U_c$ (MCOV) value

Note:  $U_c > 1.15U_n$

The relationship between two parameters  $U_c$  and  $U_p$  of a surge protective device is proportional.

If  $U_c$  is small, the value of  $U_p$  is also small; surge protective devices with smaller  $U_p$  can provide better surge protection.

Whether to choose smaller  $U_c$  depends on the voltage stability of the grid.

If you choose surge protective devices with smaller  $U_c$  for the grid with instable voltage, the surge protective devices will frequently work while the grid voltage fluctuates, resulting in shortening surge protective device's product life.

If you choose larger  $U_c$ , and the value of  $U_p$  is accordingly large, the surge protective efficiency will not be so fine.

If you are unsure of the voltage stability of the grid,

it is suggested to calculate MCOV( $U_c$ ) using the following formula:  $\sqrt{2} U_n < U_c < \sqrt{3} U_n$

AC Network ( $U_n$ )	MCOV( $U_c$ ), L/N-PE Protection Mode
110V	150V
120/208V	150V
127/220V	150V
220/380V	275V, 320V, 385V
230/400V	275V, 320V, 385V, 420V
240/415V	320V, 385V, 420V
277/480V	320V, 385V, 420V
347/600V	550V, 690V

### AC Network Connection Diagram (1/2)


1




#### AC System Voltage

L-N:  
110V, 120V, 127V  
220V, 230V, 240V  
277V, 480V


#### 2P Combination



#### 1P+NPE Combination




2

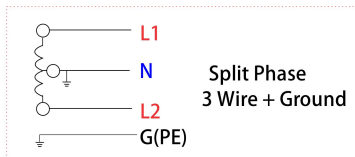


#### AC System Voltage

L-N/L-L:  
120/240V  
127/254V  
240/480V  
277/480V


#### 3P Combination



#### 2P Combination




3

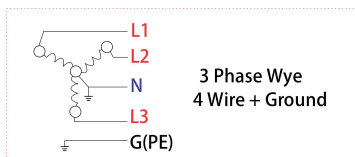


#### AC System Voltage

L-N/L-L:  
120V/208Y  
127V/220Y  
220V/380Y  
230V/400Y  
240V/415Y  
277V/480Y  
347V/600Y


#### 4P Combination



#### 3P+NPE Combination




4

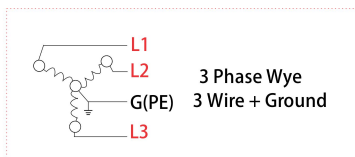


#### AC System Voltage

L-L:  
480V

#### 3P Combination




5

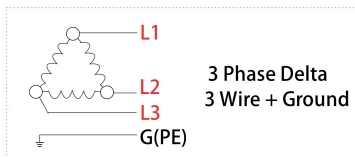

#### AC System Voltage

L-L:  
240V  
480V  
600V


#### 3P Combination






### AC Network Connection Diagram (2/2)

6

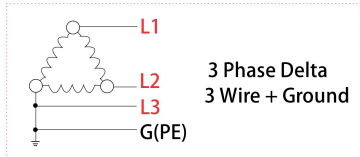


AC System Voltage

L-L:  
240V  
480V  
600V





7

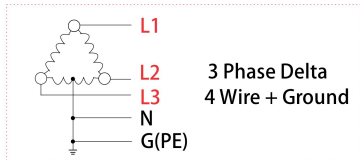


AC System Voltage

L-N/L-L:  
120/240V  
240/480V





### Difference mode & Common mode Connection Diagram

8

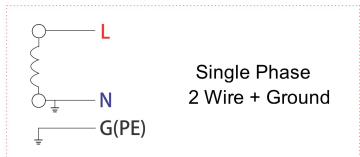

AC System Voltage


L-N:  
110V, 120V, 127V  
220V, 230V, 240V  
277V, 480V




**Common mode:** L-PE, N-PE surge protection

**Difference mode:** L-N surge protection

### Selection of back-up fuse

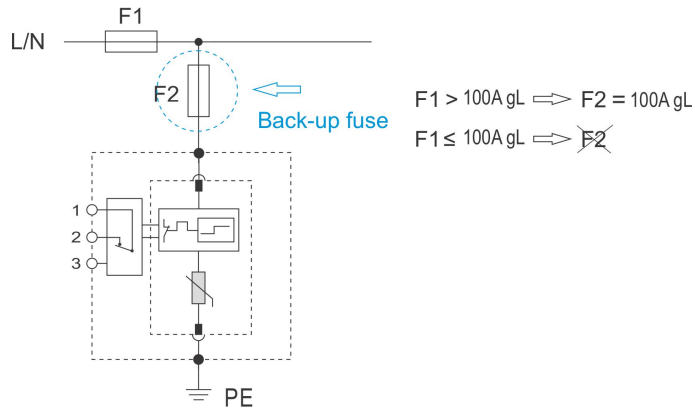


### Selection of back-up circuit-breaker

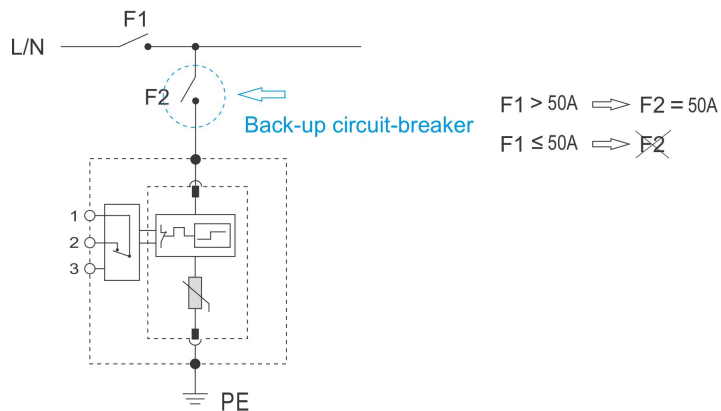

## Surge Protective Device

### Application

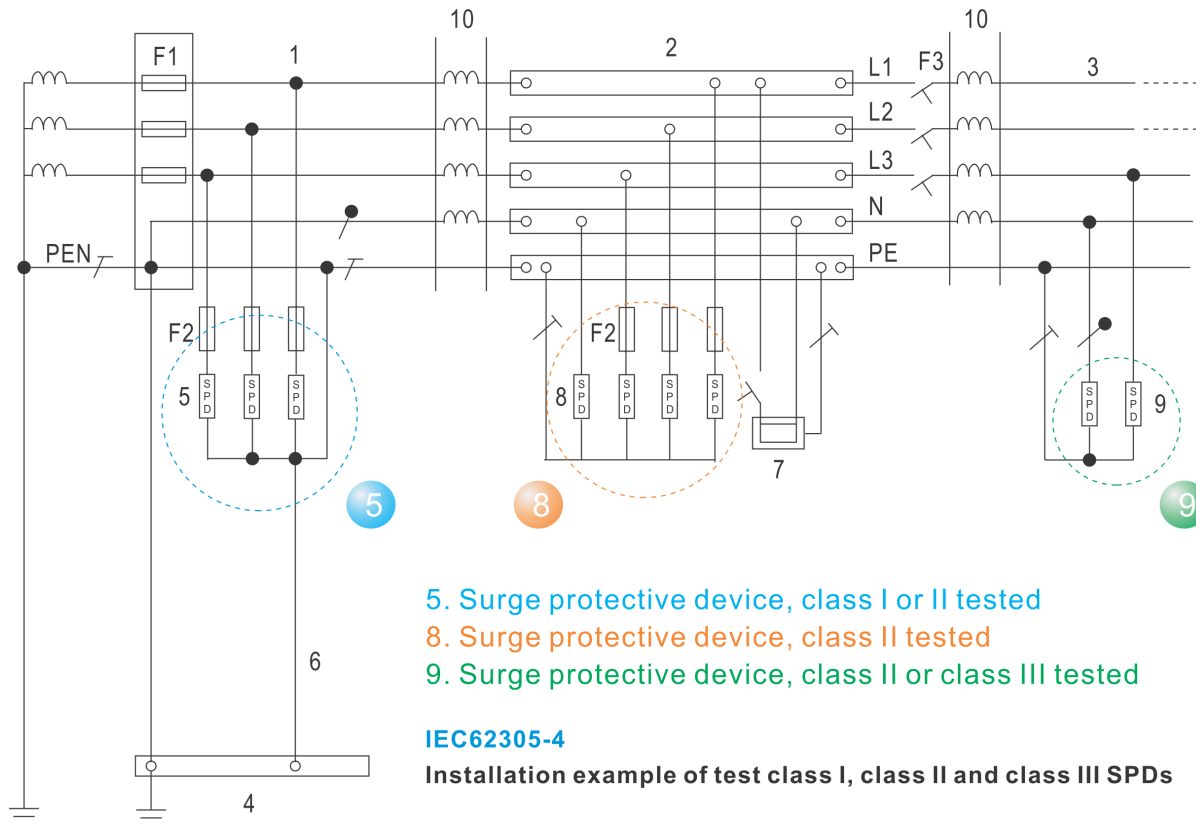

### Key

1. Origin of the installation
  2. Distribution board
  3. Distribution outlet
  4. Main earthing terminal or bar
  5. Surge protective device, class I or II tested
  6. Earthing connection (earthing conductor) of the surge protective device
  7. Fixed equipment to be protected
  8. Surge protective device, class II tested
  9. Surge protective device, class II or class III tested
  10. Decoupling element or line length
- F1, F2, F3 overcurrent protective disconnectors
- NOTE Refer to IEC 61643-12 for further information.



## Surge Protective Device

### N-PE Module

WTH-65/G+ module integrates High-Energy GDT, no leakage current. It pairs WTH-65/B+C/R series surge protector, combined into N-PE protection mode, the two modules are the same in dimension and shape, and are connected with a dedicated bus-bar to achieve a perfect combination.

#### WTH-65/G+ Technical Data

Max. continuous operating voltage (Uc)	255V
Nominal Discharge Current (In)	40kA
Max. Discharge Current (Imax)	65kA
Pulsed Current (Iimp)	22.5kA
Voltage protection level (Up)	1.1kV
Protection Modes	N-PE only
Protective Element	High Energy GDT
Follow Current (If)	100A rms
Response Time (tA)	<100ns
Net Weight Per Unit	0.24Lb (109g)

### 3P + NPE Combintion Package

Model with suffix	Ordering Code	Model with suffix	Ordering Code
WTH-65/B+C/R/1P-275 x3pcs +NPE	US120214x3N	WTH-65/B+C/1P-275 x3pcs +NPE	US120204x3N
WTH-65/B+C/R/1P-320 x3pcs +NPE	US120215x3N	WTH-65/B+C/1P-320 x3pcs +NPE	US120205x3N
WTH-65/B+C/R/1P-385 x3pcs +NPE	US120216x3N	WTH-65/B+C/1P-385 x3pcs +NPE	US120206x3N
WTH-65/B+C/R/1P-420 x3pcs +NPE	US120217x3N	WTH-65/B+C/1P-420 x3pcs +NPE	US120207x3N

### 1P + NPE Combintion Package

Model with suffix	Ordering Code	Model with suffix	Ordering Code
WTH-65/B+C/R/1P-275 +NPE	US120214x1N	WTH-65/B+C/1P-275 +NPE	US120204x1N
WTH-65/B+C/R/1P-320 +NPE	US120215x1N	WTH-65/B+C/1P-320 +NPE	US120205x1N
WTH-65/B+C/R/1P-385 +NPE	US120216x1N	WTH-65/B+C/1P-385 +NPE	US120206x1N
WTH-65/B+C/R/1P-420 +NPE	US120217x1N	WTH-65/B+C/1P-420 +NPE	US120207x1N



## Surge Protective Device

---

### FAQ & Help

1. What should I do if I can't find the paper manual in the product packaging?

Watchful Eye products is committed to going green with paperless data sheets. On the side of each product enclosure is an engraved link with URL for downloading paperless data sheet and QR code of the website. If you need the paper data sheet, you can open the link and print the data sheet by yourself.

2. The advantages of fault indication windows?

If surge protection fails, the fault indication windows will turn red, thus it can be seen intuitively, and the surge protective device can be replaced in time to avoid damage to the equipment caused by a second surge.

3. What instruments can be used to test whether its surge protection function is normal or not?

Test with a Watchful Eye surge protector tester

4. Can you list more applications?

Power supply panel, whole house

5. What is the feature of Class I+II?

It provides high capability of Class I surge protection, and capability of Class II (equivalent to the parameters of WTH-40 ) fine protection with low residual voltage as well, applying to Class I and Class II surge protection in multiple areas. If you are not sure which module to choose for protecting your area, Class I + II is the best solution.



## Surge Protective Device

---

### Download WatchfulEye Official App

To learn about more products and updates from company, please scan QR code to download the official App:



---

### After-sale Services

Watchful Eye provides a 5-year quality warranty globally.

[I have a question](#)