



Surge Protective Device

WTH-100/B+C/R Series	
Paperless Datasheet	01
Model & Ordering Code	01
Certificates of Products	01
More Package	02
Technical Data	03
Surge Protection Connection Diagram	04
Dimensions	04
Remote Contacts (Dry Contacts)	05
Fault Indication	05
Common Terms and Definitions	06
How to choose a suitable Uc(MCOV) value	06
AC Network Connection Diagram	07
Difference mode & Common mode Connection Diagram	08
Selection of back-up fuse	09
Selection of back-up circuit-breaker	09
Application	10
N-PE Module	11
3P + NPE Combintion Package	11
1P + NPE Combintion Package	11
FAQ & Help	12
Download WatchfulEyE Official App	13
After-sale Services	13
I have a question	13



Surge Protective Device

More Package

Model with suffix	WTH-100/B+C/R/1P-275	x2pcs	x3pcs	x4pcs
Ordering Code	US220274	US220274x2	US220274x3	US220274x4
Model with suffix	WTH-100/B+C/1P-275	x2pcs	x3pcs	x4pcs
Ordering Code	US220264	US220264x2	US220264x3	US220264x4
Model with suffix	WTH-100/B+C/R/1P-320	x2pcs	x3pcs	x4pcs
Ordering Code	US220275	US220275x2	US220275x3	US220275x4
Model with suffix	WTH-100/B+C/1P-320	x2pcs	x3pcs	x4pcs
Ordering Code	US220265	US220265x2	US220265x3	US220265x4
Model with suffix	WTH-100/B+C/R/1P-385	x2pcs	x3pcs	x4pcs
Ordering Code	US220276	US220276x2	US220276x3	US220276x4
Model with suffix	WTH-100/B+C/1P-385	x2pcs	x3pcs	x4pcs
Ordering Code	US220266	US220266x2	US220266x3	US220266x4
Model with suffix	WTH-100/B+C/R/1P-420	x2pcs	x3pcs	x4pcs
Ordering Code	US220277	US220277x2	US220277x3	US220277x4
Model with suffix	WTH-100/B+C/1P-420	x2pcs	x3pcs	x4pcs
Ordering Code	US220267	US220267x2	US220267x3	US220267x4



Surge Protective Device


Description

In accordance with: IEC/EN61643-11 - Class I+II and UL1449 Type 4 Location
Location of use: main sub-distribution boards, branch sub-distribution boards
Plug-in module and separate base design enables convenient maintenance.
Internal thermal disconnect devices help ensure safe or at end-of-life

WTH-100/B+C/R/1P Series Technical Data

Requirement Class to IEC/EN61643-11	Class I+II
IEEE Category Rating	C, B & A
Nominal Discharge Current (In)	50kA
Max. Discharge Current (Imax)	100kA
Pulsed Current (Iimp)	12.5kA
Protection Modes	L-PE, N-PE
Protective Element	High Energy MOV
Follow Current (If)	NO
Response Time (tA)	<5ns
Leakage Current (at 75%U1mA)	<20µA
Thermal Protection	YES
Protection Rating (IP Code)	IP 20
Short Circuit Current Ratings (SCCR)	25kA rms
Max. Back-up Fuse (if mains >100A)	100A gL (circuit-breaker: <50A)
Surge Life at 3kA (8/20µs)	>5000 events
Temperature Range	- 40°F to 176°F (-40°C to 80°C)
Relative Humidity	0% to 95% noncondensing
Maximum Operating Altitude	10,000 feet (3000m)
Terminal Cross Section	35mm ² (solid) / 25mm ² (stranded)
Stripping Length Contacts	0.6inches (15mm)
Terminal Screw Torque	Max. 3.5Nm
DIN Rail EN60715	35mm top-hat rail
Dimensions DIN 43880	36mm (2TE)
Housing Material	Thermoplastic (UL94 V-0)
Housing Design	Modular design
Net Weight Per Unit	0.5Lb (227g)

Surge Protection Connection Diagram

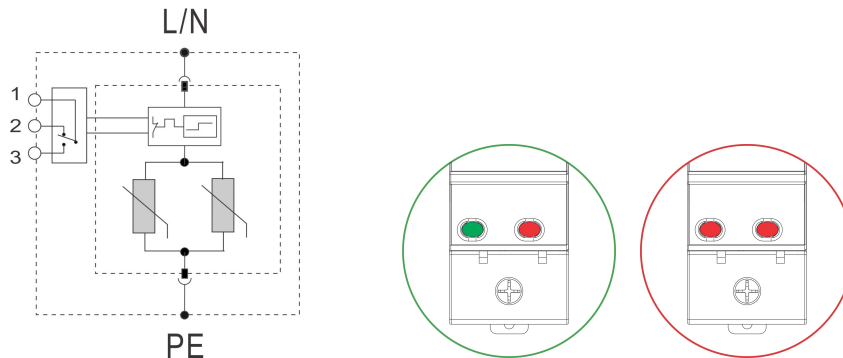


Indication of two levels of surge protection

The capability of displaying 50 percent of surge protection capacity: under normal circumstances, with two MOVs' protection at the same time, the module can realize Class I surge protection; in case that one of the indicator windows indicates red, there's still 50% of surge protection capacity to meet Class II surge protection requirements, and the module shall be replaced timely at this point.


Maximum Continuous Operating Voltage (MCOV/Uc)	275VAC	320VAC	385VAC	420VAC
Voltage Protection Level (Up)	1.9kV	2.1kV	2.2kV	2.3kV
Residual Voltage (Ures)	1.0kV	1.1kV	1.2kV	1.4kV

Dimensions

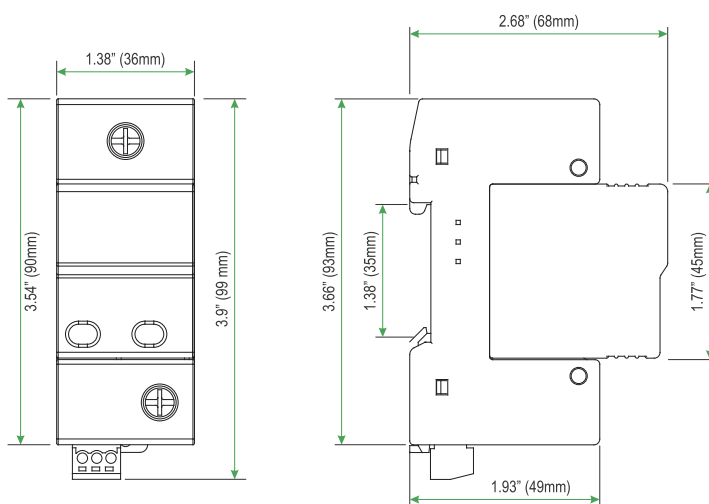


Remote Contacts (Dry Contacts)

- 1: COM (Common)
- 2: NC (Normally Close)
- 3: NO (Normally Open)

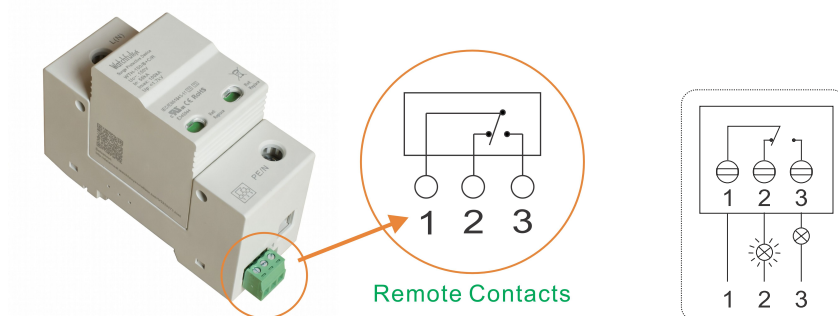

Contact Ratings	125VAC/3A, 250VAC/1.5A
Terminal Cross Section	Max. 1.5mm ²
Stripping Length Contacts	0.25 inches (6-7mm)
Remote Terminal Torque	0.25Nm

Fault Indication

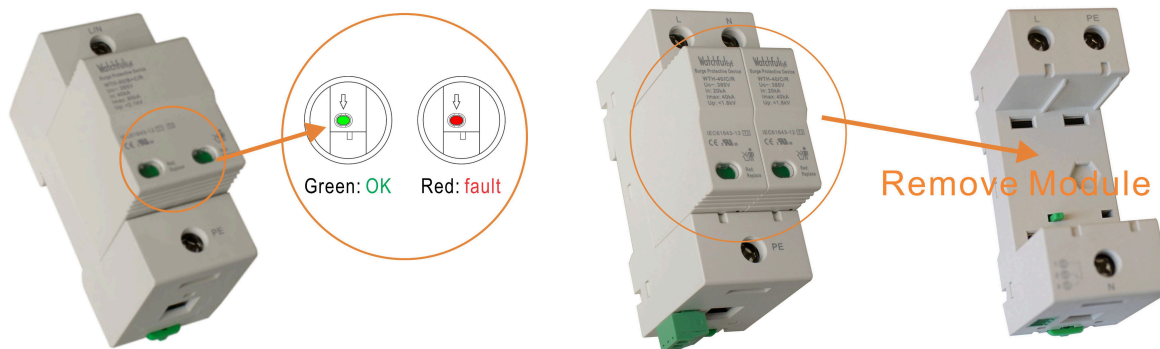



Surge Protective Device

Common Terms and Definitions

1. Normal operating voltage rating (U_n)
2. Maximum Continuous Operating Voltage (U_c /MCOV):
Maximum r.m.s. voltage, which may be continuously applied to the surge protective device's mode of protection.
3. Nominal Discharge Current for Class II Test (I_n):
crest value of the current through the surge protective device having a current waveshape of $8/20\mu s$.
4. Maximum Discharge Current (I_{max}):
Crest value of a current through the surge protective device having an $8/20\mu s$ waveshape and magnitude according to the manufacturers specification. I_{max} is equal to or greater than I_n .
5. Voltage Protection Level (U_p):
Maximum voltage to be expected at the surge protective device terminals due to an impulse stress with defined voltage steepness and an impulse stress with a discharge current with given amplitude and waveshape.
6. Residual Voltage (U_{res}):
Crest value of voltage that appears between the terminals of an surge protective device due to the passage of discharge current.
7. IEEE 62.41
CATEGORY C: outdoor overhead lines, service entrance (most severe)
CATEGORY B: major feeder, short branch circuits, service panel (indoor)
CATEGORY A: long branch circuits, receptacles (indoor) (least severe)

How to choose a suitable U_c (MCOV) value

Note: $U_c > 1.15U_n$

The relationship between two parameters U_c and U_p of a surge protective device is proportional.

If U_c is small, the value of U_p is also small; surge protective devices with smaller U_p can provide better surge protection.

Whether to choose smaller U_c depends on the voltage stability of the grid.

If you choose surge protective devices with smaller U_c for the grid with instable voltage, the surge protective devices will frequently work while the grid voltage fluctuates, resulting in shortening surge protective device's product life.

If you choose larger U_c , and the value of U_p is accordingly large, the surge protective efficiency will not be so fine.

If you are unsure of the voltage stability of the grid,

it is suggested to calculate MCOV(U_c) using the following formula: $\sqrt{2} U_n < U_c < \sqrt{3} U_n$

AC Network (U_n)	MCOV(U_c), L/N-PE Protection Mode
110V, 120/208V, 127/220V	150V
220/380V	275V, 320V, 385V
230/400V	275V, 320V, 385V, 420V
240/415V	320V, 385V, 420V
266/460V, 277/480V	385V, 420V
347/600V	550V, 690V
Wind Power System	690V (Grid side), 885V (Gen side)

AC Network Connection Diagram (1/2)


1




AC System Voltage

L-N:
110V, 120V, 127V
220V, 230V, 240V
277V, 480V


2P Combination



1P+NPE Combination




2




AC System Voltage

L-N/L-L:
120/240V
127/254V
240/480V
277/480V


3P Combination



2P Combination




3




AC System Voltage

L-N/L-L:
120V/208Y
127V/220Y
220V/380Y
230V/400Y
240V/415Y
277V/480Y
347V/600Y


4P Combination



3P+NPE Combination




4




AC System Voltage

L-L:
480V

3P Combination




5



AC System Voltage


L-L:
240V
480V
600V

3P Combination




AC Network Connection Diagram (2/2)

6




AC System Voltage

L-L:
240V
480V
600V





7




AC System Voltage

L-N/L-L:
120/240V
240/480V





Difference mode & Common mode Connection Diagram

8



AC System Voltage


L-N:
110V, 120V, 127V
220V, 230V, 240V
277V, 480V




Common mode: L-PE, N-PE surge protection

Difference mode: L-N surge protection


Selection of back-up fuse

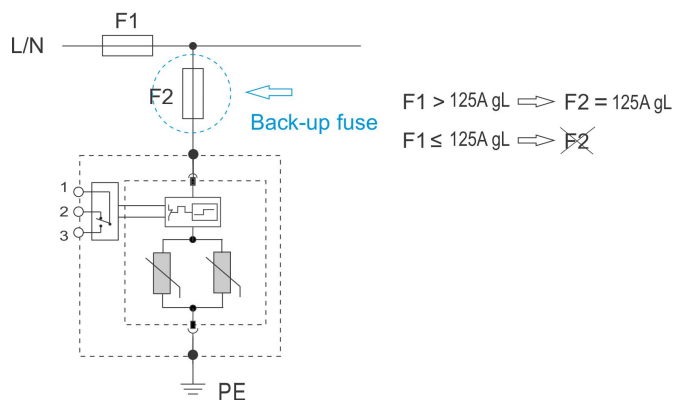

Selection of back-up circuit-breaker

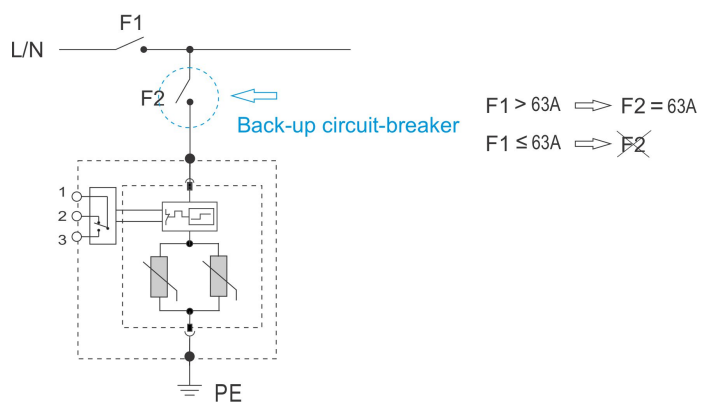

Application

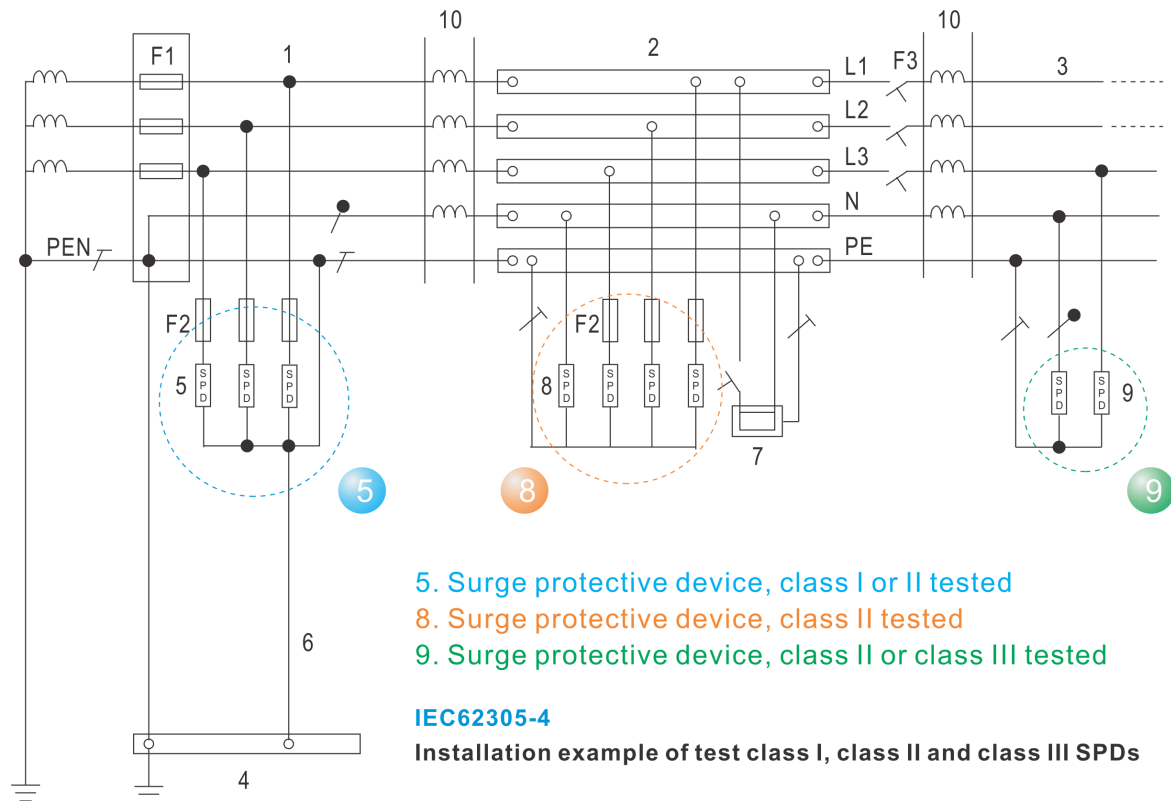

Key

1. Origin of the installation
 2. Distribution board
 3. Distribution outlet
 4. Main earthing terminal or bar
 5. Surge protective device, class I or II tested
 6. Earthing connection (earthing conductor) of the surge protective device
 7. Fixed equipment to be protected
 8. Surge protective device, class II tested
 9. Surge protective device, class II or class III tested
 10. Decoupling element or line length
- F1, F2, F3 overcurrent protective disconnectors
- NOTE Refer to IEC 61643-12 for further information.



Surge Protective Device

N-PE Module

WTH-100/G module integrates High-Energy GDT, no leakage current. It pairs WTH-100/B+C/R series surge protector, combined into N-PE protection mode, the two modules are the same in dimension and shape, and are connected with a dedicated bus-bar to achieve a perfect combination.

WTH-100/G Technical Data

Max. continuous operating voltage (Uc)	255V
Nominal Discharge Current (In)	50kA
Max. Discharge Current (Imax)	100kA
Pulsed Current (Iimp)	37.5kA
Voltage protection level (Up)	1.2kV
Protection Modes	N-PE only
Protective Element	High Energy GDT
Follow Current (If)	100A rms
Response Time (tA)	<100ns
Net Weight Per Unit	0.4Lb (180g)

3P + NPE Combintion Package

Model with suffix	Ordering Code	Model with suffix	Ordering Code
WTH-100/B+C/R/1P-275 x3pcs +NPE	US220274x3N	WTH-100/B+C/1P-275 x3pcs +NPE	US220264x3N
WTH-100/B+C/R/1P-320 x3pcs +NPE	US220275x3N	WTH-100/B+C/1P-320 x3pcs +NPE	US220265x3N
WTH-100/B+C/R/1P-385 x3pcs +NPE	US220276x3N	WTH-100/B+C/1P-385 x3pcs +NPE	US220266x3N
WTH-100/B+C/R/1P-420 x3pcs +NPE	US220277x3N	WTH-100/B+C/1P-420 x3pcs +NPE	US220267x3N

1P + NPE Combintion Package

Model with suffix	Ordering Code	Model with suffix	Ordering Code
WTH-100/B+C/R/1P-275 +NPE	US220274x1N	WTH-100/B+C/1P-275 +NPE	US220264x1N
WTH-100/B+C/R/1P-320 +NPE	US220275x1N	WTH-100/B+C/1P-320 +NPE	US220265x1N
WTH-100/B+C/R/1P-385 +NPE	US220276x1N	WTH-100/B+C/1P-385 +NPE	US220266x1N
WTH-100/B+C/R/1P-420 +NPE	US220277x1N	WTH-100/B+C/1P-420 +NPE	US220267x1N



Surge Protective Device

FAQ & Help

1. What should I do if I can't find the paper manual in the product packaging?

Watchful Eye products is committed to going green with paperless data sheets. On the side of each product enclosure is an engraved link with URL for downloading paperless data sheet and QR code of the website. If you need the paper data sheet, you can open the link and print the data sheet by yourself.

2. The advantages of fault indication windows?

If surge protection fails, the fault indication windows will turn red, thus it can be seen intuitively, and the surge protective device can be replaced in time to avoid damage to the equipment caused by a second surge.

3. What instruments can be used to test whether its surge protection function is normal or not?

Test with a Watchful Eye surge protector tester

4. How to connections of the SPD?

Please refer to the standard IEC 60364-5-53

Connecting conductors of SPDs:

Conductors between the SPD and the main earthing terminal or the protective conductor shall have a cross-sectional area not less than: - 6 mm² copper or equivalent for class II tested SPDs installed at or near the origin of the installation;

- 16 mm² copper or equivalent for class I tested SPDs installed at or near the origin of the installation.

a) L/N to surge protector copper recommended diameter: 7AWG (10mm²), minimum: 6mm²

b) surge protector to PE copper recommended diameter: 5AWG (16mm²), minimum: 10mm²

(a+b) ≤ 0.5m

5. Can you list more applications?

Power supply panel, whole house

6. What is the feature of Class I+II?

It provides high capability of Class I surge protection, and capability of Class II (equivalent to the parameters of WTH-40) fine protection with low residual voltage as well, applying to Class I and Class II surge protection in multiple areas. If you are not sure which module to choose for protecting your area, Class I + II is the best solution.



Surge Protective Device

Download WatchfulEye Official App

To learn about more products and updates from company, please scan QR code to download the official App:



After-sale Services

Watchful Eye provides a 5-year quality warranty globally.

[I have a question](#)