WatchfulEyE

Surge Protective Device

Paperless Datasheet

Going green and protecting environment is manufacturers' responsibility. Each WatchfulEyE product has a link of downloading data sheet on its enclosure:
http://datasheet.watchfuleyesolutions.com/US120323.html

3D file download

http://www.watchfuleyesolutions.com/wth_rar/3D/WTH-165.STEP.zip

Model & Ordering Code

Model	Ordering Code	Remote Contacts	UPC/EAN Code
WTH-165/B/R/1P-150	US120323	YES	(0) 811914030997
WTH-165/B/1P-150	US120313	NO	(0) 811914031048

Model with suffix	WTH-165/B/R/1P-150	x2pcs	x3pcs	x4pcs
Ordering Code	US120323	US120323x2	US120323x3	US120323x4

Model with suffix	WTH-165/B/1P-150	x2pcs	x3pcs	x4pcs
Ordering Code	US120313	US120313x2	US120313x3	US120313x4

Certificates of Products

CE RoHS IEC61643-11

WatchfulEyE

Surge Protective Device

Description

In accordance with: IEC/EN61643-11 - Class I and UL1449 Type 4 Location
Location of use: main sub-distribution boards
One-piece compact design with minimized volume but maximized capability of Class I surge protection.
Internal thermal disconnect devices help ensure safe or at end-of-life

WTH-165/B/R/1P-150 Series Technical Data	
Requirement Class to IEC/EN61643-11	Class I
IEEE Category Rating	C & B
Maximum Continuous Operating Voltage (Uc/MCOV)	150VAC 50/60Hz
Nominal Discharge Current (In)	80kA
Max. Discharge Current (Imax)	165kA
Pulsed Current (Iimp)	17.5kA
Voltage Protection Level (Up)	2.0kV
Residual Voltage (Ures)	0.8kV
Protection Modes	L-PE, N-PE
Protective Element	High Energy MOV
Follow Current (If)	NO
Response Time (tA)	<5ns
Leakage Current (at 75%U1mA)	<20μA
Thermal Protection	YES
Protection Rating (IP Code)	IP 20
Short Circuit Current Ratings (SCCR)	25kA rms
Max. Back-up Fuse (if mains >160A)	160A gL (circuit-breaker: <100A)
Surge Life at 3kA (8/20μs)	>5000 events
Temperature Range	– 40˚F to 176˚F (-40˚C to 80˚C)
Relative Humidity	0% to 95% noncondensing
Maximum Operating Altitude	10,000 feet (3000m)
Terminal Cross Section	35mm² (solid) / 25mm² (stranded)
Stripping Length Contacts	0.6inches (15mm)
Terminal Screw Torque	Max. 3.5Nm
DIN Rail EN60715	35mm top-hat rail
Dimensions DIN 43880	36mm (2TE)
Housing Material	Thermoplastic (UL94 V-0)
Housing Design	One-piece compact design
Net Weight Per Unit	0.46Lb (209g)

Surge Protection Connection Diagram

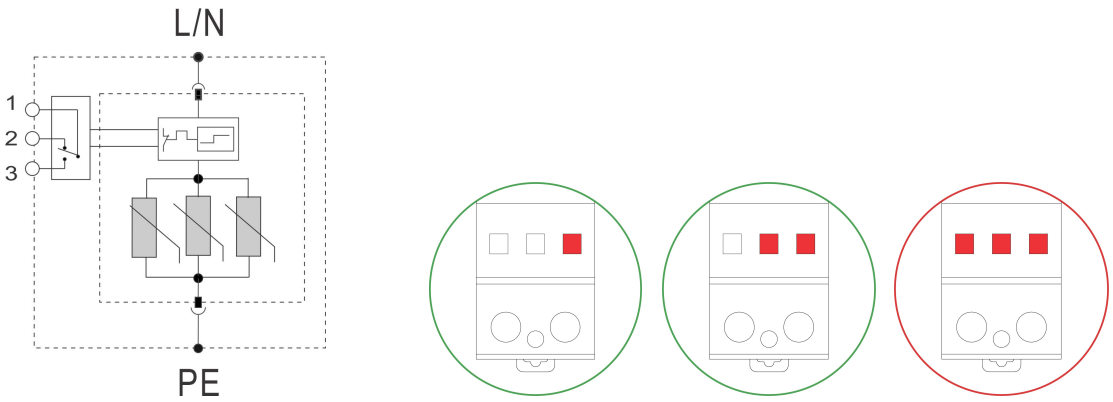

Indication of three levels of surge protection
With three MOVs' protection at the same time, the module can realize Class I surge protection; in case that two of the indicator windows indicates red, it can still meet Class II surge protection requirements.

Dimensions

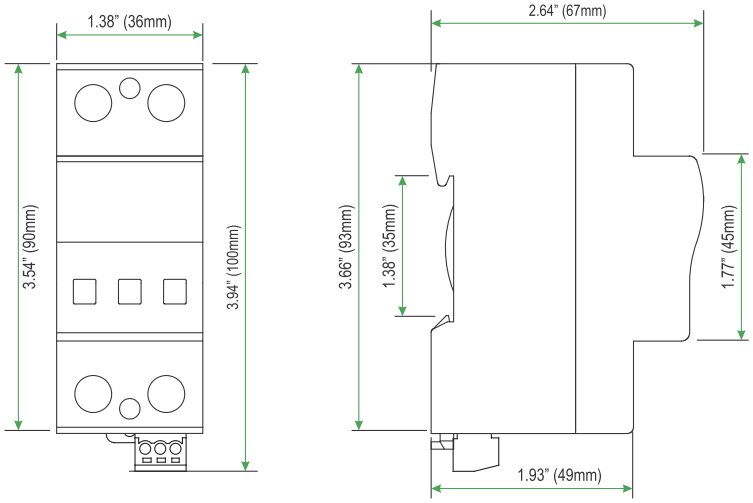

.

Remote Contacts (Dry Contacts)

1: COM (Common)
2: NC (Normally Close)
3: NO (Normally Open)

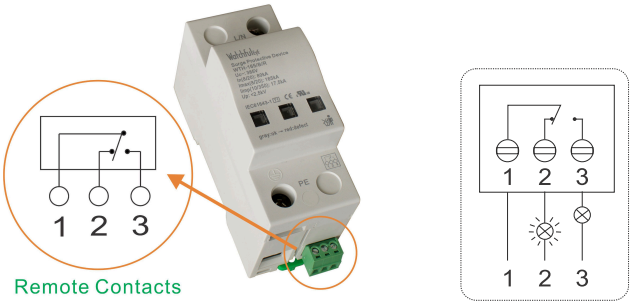

Contact Ratings	125VAC/3A, 250VAC/1.5A
Terminal Cross Section	Max. 1.5mm²
Stripping Length Contacts	0.25 inches (6-7mm)
Remote Terminal Torque	0.25Nm

Fault Indication

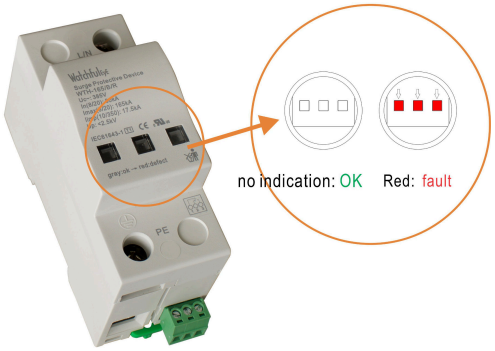

Common Terms and Definitions

1. Normal operating voltage rating (Un)
2. Maximum Continuous Operating Voltage (Uc/MCOV):
Maximum r.m.s. voltage, which may be continuously applied to the surge protective device's mode of protection.
3. Nominal Discharge Current for Class II Test (In):
crest value of the current through the surge protective device having a current waveshape of 8/20μs.
4. Maximum Discharge Current (Imax):
Crest value of a current through the surge protective device having an 8/20μs waveshape and magnitude according to the manufacturers specification. Imax is equal to or greater than In.
5. Voltage Protection Level (Up):
Maximum voltage to be expected at the surge protective device terminals due to an impulse stress with defined voltage steepness and an impulse stress with a discharge current with given amplitude and waveshape.
6. Residual Voltage (Ures):
Crest value of voltage that appears between the terminals of an surge protective device due to the passage of discharge current.
7. IEEE 62.41
CATEGORY C: outdoor overhead lines, service entrance (most severe)
CATEGORY B: major feeder, short branch circuits, service panel (indoor)
CATEGORY A: long branch circuits, receptacles (indoor) (least severe)

How to choose a suitable Uc(MCOV) value

Note: Uc >1.15Un
The relationship between two parameters Uc and Up of a surge protective device is proportional.
If Uc is small, the value of Up is also small; surge protective devices with smaller Up can provide better surge protection.
Whether to choose smaller Uc depends on the voltage stability of the grid.
If you choose surge protective devices with smaller Uc for the grid with instable voltage, the surge protective devices will frequently work while the grid voltage fluctuates, resulting in shortening surge protective device's product life.
If you choose larger Uc, and the value of Up is accordingly large, the surge protective efficiency will not be so fine.
If you are unsure of the voltage stability of the grid,
it is suggested to calculate MCOV(Uc) using the following formula: $\sqrt{2}$ Un < Uc < $\sqrt{3}$ Un

AC Network (Un)	MCOV(Uc), L/N-PE Protection Mode
110V, 120/208V, 127/220V	150V
220/380V	275V, 320V, 385V
230/400V	275V, 320V, 385V, 420V
240/415V	320V, 385V, 420V
266/460V, 277/480V	385V, 420V
347/600V	550V, 690V
Wind Power System	690V (Grid side), 885V (Gen side)

AC Network Connection Diagram



Single Phase
2 Wire + Ground

AC System Voltage

L-N:
110V, 120V, 127V

2P Combination



1P+NPE Combination





Split Phase
3 Wire + Ground

AC System Voltage

L-N/L-L:
120/240V
127/254V

3P Combination



2P Combination





3 Phase Wye
4 Wire + Ground

AC System Voltage

L-N/L-L:
120V/208Y
127V/220Y

4P Combination



3P+NPE Combination





3 Phase Delta
4 Wire + Ground

AC System Voltage

L-N/L-L:
120/240V

4P Combination



3P+NPE Combination



.

Difference mode & Common mode Connection Diagram







Common mode: L-PE, N-PE surge protection
Difference mode: L-N surge protection

Selection of back-up fuse

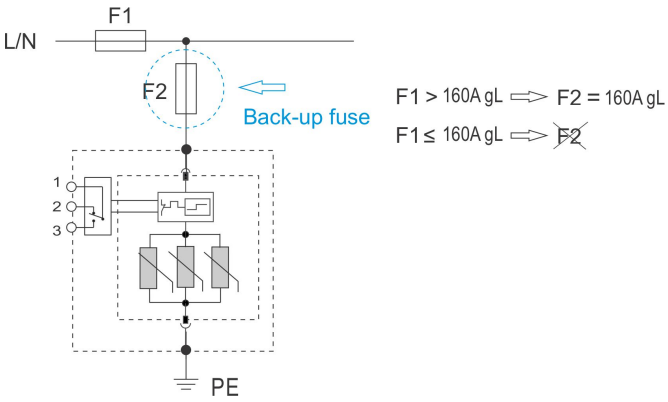

F1 > 160A gL ⇨ F2 = 160A gL
F1 ≤ 160A gL ⇨ ~~F2~~

Selection of back-up circuit-breaker

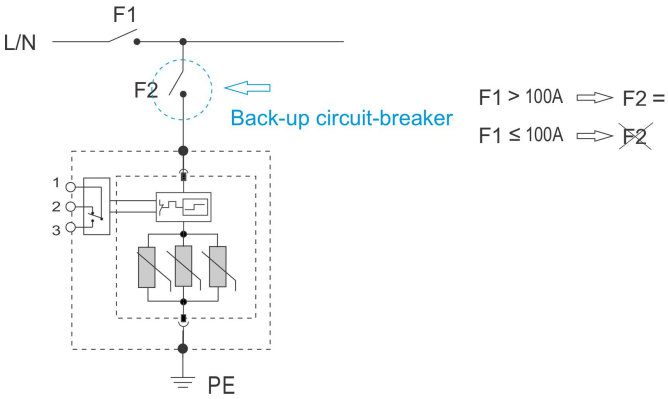

F1 > 100A ⇨ F2 = 100A
F1 ≤ 100A ⇨ ~~F2~~

.

Application

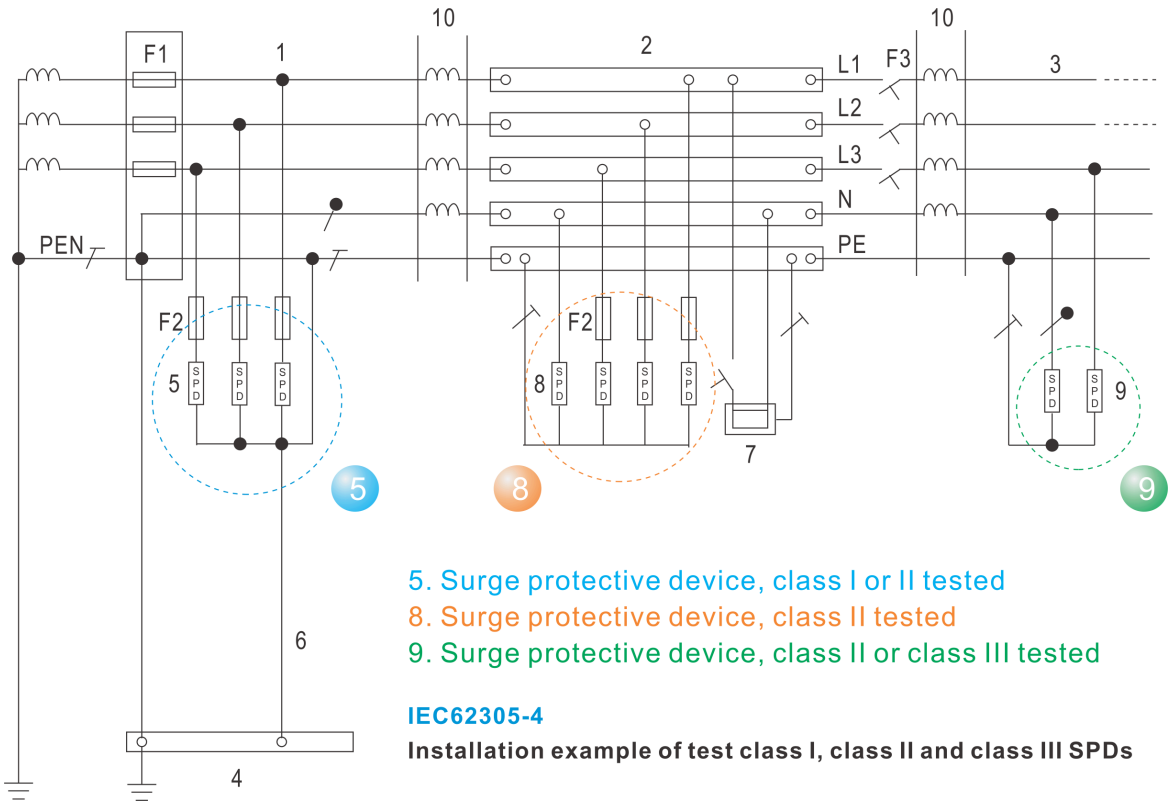

5. Surge protective device, class I or II tested
8. Surge protective device, class II tested
9. Surge protective device, class II or class III tested

IEC62305-4

Installation example of test class I, class II and class III SPDs

Key
1. Origin of the installation
2. Distribution board
3. Distribution outlet
4. Main earthing terminal or bar
5. Surge protective device, class I or II tested
6. Earthing connection (earthing conductor) of the surge protective device
7. Fixed equipment to be protected
8. Surge protective device, class II tested
9. Surge protective device, class II or class III tested
10. Decoupling element or line length
F1, F2, F3 overcurrent protective disconnectors
NOTE Refer to IEC 61643-12 for further information.

N-PE Module (Model: WTH-165/G/1P-255 Ordering Code: US120289)

WTH-165/G module integrates High-Energy GDT, no leakage current. It pairs WTH-165/B/R series surge protector, combined into N-PE protection mode, the two modules are the same in dimension and shape, and are connected with a dedicated bus-bar to achieve a perfect combination.

WTH–165/G Series Technical Data	
Max. continuous operating voltage (Uc)	255V
Nominal Discharge Current (In)	80kA
Max. Discharge Current (Imax)	165kA
Pulsed Current (Iimp)	52.5kA
Voltage protection level (Up)	1.5kV
Protection Modes	N–PE only
Protective Element	High Energy GDT
Follow Current (If)	100A rms
Response Time (tA)	<100ns
Net Weight Per Unit	0.4Lb (180g)

3P + NPE Combintion Package

Model with suffix	Ordering Code	Model with suffix	Ordering Code
WTH–165/B/R/1P–150 x3pcs +NPE	US120323x3N	WTH–165/B/1P–150 x3pcs +NPE	US120313x3N

1P + NPE Combintion Package

Model with suffix	Ordering Code	Model with suffix	Ordering Code
WTH–165/B/R/1P–150 +NPE	US120323x1N	WTH–165/B/1P–150 +NPE	US120313x1N

FAQ & Help

1. What should I do if I can't find the paper manual in the product packaging?
Watchful Eye products is committed to going green with paperless data sheets. On the side of each product enclosure is an engraved link with URL for downloading paperless data sheet and QR code of the website. If you need the paper data sheet, you can open the link and print the data sheet by yourself.

2. The advantages of fault indication windows?
If surge protection fails, the fault indication windows will turn red, thus it can be seen intuitively, and the surge protective device can be replaced in time to avoid damage to the equipment caused by a second surge.

3. What instruments can be used to test whether its surge protection function is normal or not?
Test with a Watchful Eye surge protector tester

4. How to connections of the SPD?
Please refer to the standard IEC 60364-5-53
Connecting conductors of SPDs:
Conductors between the SPD and the main earthing terminal or the protective conductor shall have a cross-sectional area not less than: - 6 mm² copper or equivalent for class II tested SPDs installed at or near the origin of the installation;
- 16 mm² copper or equivalent for class I tested SPDs installed at or near the origin of the installation.
a) L/N to surge protector copper recommended diameter: 7AWG (10mm²), minimum: 6mm²
b) surge protector to PE copper recommended diameter: 5AWG (16mm²), minimum: 10mm²
(a+b) ≤ 0.5m

5. Can you list more applications?
Power supply panel, whole house

Download WatchfulEyE Official App

To learn about more products and updates from company, please scan QR code to download the official App:

After-sale Services

Watchful Eye provides a 5-year quality warranty globally.

I have a question